







# Plasma Cutting Torch-S45

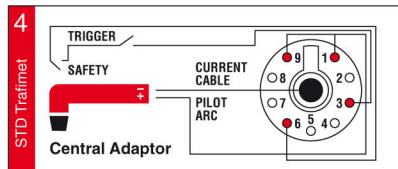

**NO HF**

4-6 m / 12.5'-19.7'    0.4 Kg / 0.88 lb



 1 m

V peak	500		5 bar		115 l/min
X 60%	40 A		8+12 mm		

CODE	↔	⊞
PA0201	6 m / 19.7'	1/4 G
PA0202	6 m / 19.7'	Central Adaptor
PA0203	4 m / 12.5'	1/4 G S



**FLOW METER**  
Included in the box

max —  
min —

CV0085

PD0116-08

test the airflow of your torch before use



EN 60974-7



# Plasma Cutting Torch-S45

CWPR0105



CWPR0110



CWPR0106



CWPE0106



CWPE0106



CWPE0106



Ø mm	Ø in	Cu	
0,8	.030	CWPD0101-08	30 A
1,0	.040	CWPD0102-10	50 A

Ø mm	Ø in	Cu	
0,6	.023	CWPD0116-06	20 A
0,8	.030	CWPD0116-08	30 A
0,9	.035	CWPD0116-09	40 A

Ø mm	Ø in	Cu	
0,65	.025	CWPD0103-65	20 A
0,9	.035	CWPD0103-09	40 A

CWPC0116



no ring


CWPC0116



CWCV0010



CWCV0024



TORCH WITHOUT SAFETY TRIGGER



CWTP0080



CWPE0125

CWEA0236



CWTP0086



CWBX0020

Ø 3

CWPE0125

